



SEE BETTER • FEEL BETTER • FUNCTION BETTER





WalaLight 24

A rectangular 2 foot x 4 foot LED light, the Wala24 provides substantial money-savings and energy-efficiency compared to fluorescent ceiling lights. The 2' x 4' LED lighting system is dimmable to any brightness level and kelvin variable between bright natural daylight (5700 Kelvin) and warm light (2200 Kelvin).



Wala 24™ System

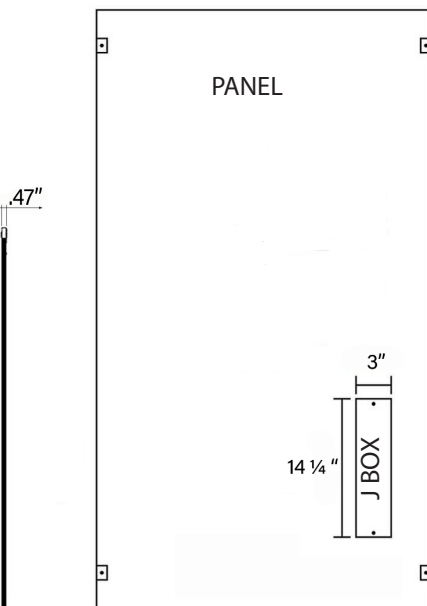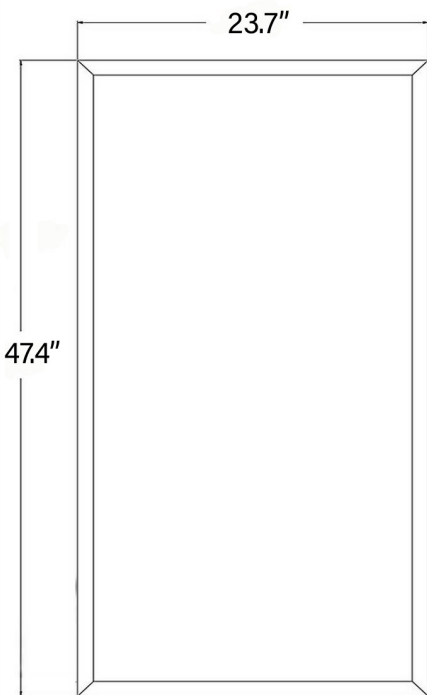

PRODUCT TYPE	Kelvin & dimming variable edge lit low glare LED panel
MANUFACTURER	WalaLight
MODEL NUMBER	W24WH50v3
RATED VOLTAGE	100 -277 VAC, 50/60 Hz
WATTAGE	50W
LUMENS	Up to 4865 lumens
KELVIN	2200 to 5700
LED CHIPSET	240 pcs of 3528 and 3030 Seoul Semiconductor SunLike diodes
POWER FACTOR	0.94
BEAM ANGLE	120 degrees
CRI	>95 daylight >90 warm
LIFESPAN	>90,000 Hours (per L70 report)
DIMMABLE	YES - Kelvin & brightness adjustable
WARRANTY	10 years on panels, 5 years on optional driver / controls
CERTIFICATION	
DIMENSIONS	2'x4' (603mm x 1206mm)
THICKNESS	.47" (12mm) or 1 3/4" with optional junction box
WEIGHT	17.02 lbs (included junction box)
FRAME	Aluminum with White powder coated finish
MOUNTING	Fits in ceiling grid or flush mount kit, or pendant hang (sold separately)
LIGHT GUIDE	PMMA non-yellowing 3mm diamond cut acrylic
PERCENT OF WATTAGE SAVED FROM AVERAGE REPLACEMENT*	Up to 67%

(*excludes savings in labor, frequency of bulb changes, ballast, and HVAC savings)